NEW

OMRON

Proximity Sensors

E2V-X□

30 Years of Innovation

Long-distance Detection of Aluminum or Iron
A Proximity Sensor with a NEW Detection Principle

Smartclick
Pre-wired Connector Models
Standard Models

realizing

CE

Aluminum Detection Distance: 1.5 to 2 Times Previous Models

*In-house comparison of M18 Shielded Long-distance Models

Immunity against aluminum chips has enabled achieving long-distance detection of aluminum workpieces. The same detection distance has also been achieved for iron, allowing the E2V-X□ to be separated from workpieces made of either metal farther than any other Proximity Sensor.

Aluminum Excellent Performance, with Aluminum Chip Immunity!

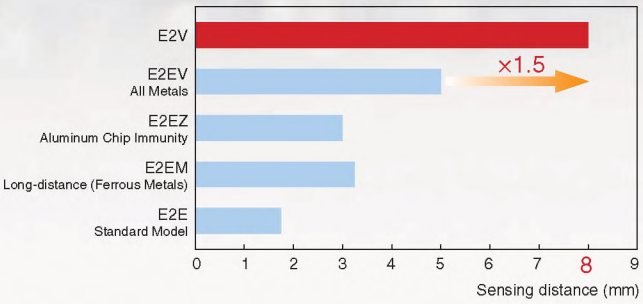

Iron Also Detects Iron at Long Distances!

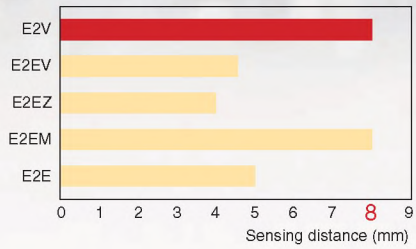

Detection Made Visible

An operation indicator that is visible from any direction is provided as a standard feature.
This indicator flashes under unstable conditions for easy installation condition verification at a glance.



Previous Sensor



E2V Pre-wired Models and Pre-wired Connector Models

E2V Connector Models

Embeddable in Metal.

The first Long-distance Sensor that is shielded. Possible to be completely embedded in metal.

Embedded Mounting in Metal

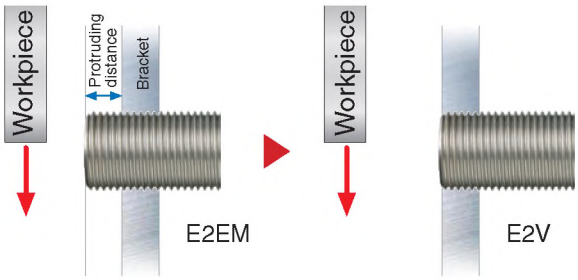

Applications

Long-distance Detection of Crankshafts



Cylinder Block Seating Detection



Detect Passing Parts

Ordering Information

Standard-distance Sensors, DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)

Models with 5-m cables are also available and are ordered by adding "5M" to the end of the model number (e.g., E2V-X2B1 5M).

Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
 Shielded	M12	2mm	PNP	E2V-X2B1	E2V-X2B2
			NPN	E2V-X2C1	E2V-X2C2
	M18	5mm	PNP	E2V-X5B1	E2V-X5B2
			NPN	E2V-X5C1	E2V-X5C2
	M30	10mm	PNP	E2V-X10B1	E2V-X10B2
			NPN	E2V-X10C1	E2V-X10C2

Long-distance Sensors, DC 3-wire, Pre-wired Models (Standard Cable Length: 2 m)

Models with 5-m cables are also available and are ordered by adding "5M" to the end of the model number (e.g., E2V-X4B1 5M).

Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
 Shielded	M12	4mm	PNP	E2V-X4B1	E2V-X4B2
			NPN	E2V-X4C1	E2V-X4C2
	M18	8mm	PNP	E2V-X8B1	E2V-X8B2
			NPN	E2V-X8C1	E2V-X8C2
	M30	15mm	PNP	E2V-X15B1	E2V-X15B2
			NPN	E2V-X15C1	E2V-X15C2

Long-distance Sensors, DC 3-wire, Connector Models

Appearance		Sensing distance	Output	Model	
				Operation mode NO	Operation mode NC
 Shielded	M12	4mm	PNP	E2V-X4B1-M1	E2V-X4B2-M1
			NPN	E2V-X4C1-M1	E2V-X4C2-M1
	M18	8mm	PNP	E2V-X8B1-M1	E2V-X8B2-M1
			NPN	E2V-X8C1-M1	E2V-X8C2-M1
	M30	15mm	PNP	E2V-X15B1-M1	E2V-X15B2-M1
			NPN	E2V-X15C1-M1	E2V-X15C2-M1

Long-distance Sensors, DC 3-wire, Smartclick Pre-wired Connector (M12) Models

Appearance		Sensing distance	Output	Model
				Operation mode NO
 Shielded	M12	4mm	PNP	E2V-X4B1-M1TJ
			NPN	E2V-X4C1-M1TJ
	M18	8mm	PNP	E2V-X8B1-M1TJ
			NPN	E2V-X8C1-M1TJ
	M30	15mm	PNP	E2V-X15B1-M1TJ
			NPN	E2V-X15C1-M1TJ

Standard "Twist-and-Click" Smartclick Connectors

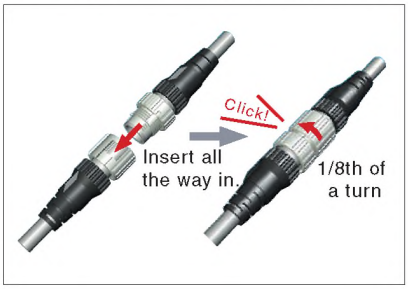

Appearance	Type	Cable length (m)	Model	Applicable Proximity Sensor Models
Smartclick Connector, Straight 	Standard cable	2	XS5F-D421-D80-A	E2V-X□□□-M1/M1TJ
		5	XS5F-D421-G80-A	E2V-X□□□-M1/M1TJ
	Vibration-proof robot cable	2	XS5F-D421-D80-F	E2V-X□□□-M1/M1TJ
		5	XS5F-D421-G80-F	E2V-X□□□-M1/M1TJ
	Oil-resistant polyurethane cable	2	XS5F-D421-D80-P	E2V-X□□□-M1/M1TJ
		5	XS5F-D421-G80-P	E2V-X□□□-M1/M1TJ

Ratings and Specifications

Size		M12		M18		M30	
Item \ Model		E2V-X2□□	E2V-X4□□	E2V-X5□□	E2V-X8□□	E2V-X10□□	E2V-X15□□
Sensing distance		2mm±10%	4mm±10%	5mm±10%	8mm±10%	10mm±10%	15mm±10%
Set distance		0 to 1.6 mm	0 to 3.2 mm	0 to 4.0 mm	0 to 6.4 mm	0 to 8.0 mm	0 to 12.0 mm
Differential travel		10% max. of sensing distance					
Detectable object		Ferrous metals and non-ferrous metals (The sensing distance depends on the material of the sensing object. Refer to *Engineering Data (Typical)*.)					
Standard sensing object		Aluminum: 12 × 12 × 3 mm	Aluminum: 12 × 12 × 3 mm	Aluminum: 18 × 18 × 3 mm	Aluminum: 24 × 24 × 3 mm	Aluminum: 30 × 30 × 3 mm	Aluminum: 45 × 45 × 3 mm
Response frequency*		150Hz	40Hz	70Hz	40Hz	70Hz	30Hz
Power supply voltage (operating voltage range)		12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.					
Current consumption		450 mW max. (Current consumption: 15 mA max. at power supply voltage of 30 V)					
Control output	Load current	Open-collector output, 100 mA max.					
	Residual voltage	2 V max. (Load current: 100 mA, Cable length: 2 m)					
Indicators		NO Models: Operation indicator (yellow) (flashing), Setting indicator (yellow) (lit); NC Models: Operation indicator (yellow) (lit)					
Operation mode		B1/C1 Models: NO B2/C2 Models: NC (Refer to the timing charts under *I/O Circuit Diagrams* for details.)					
Protection circuits		Power supply reverse polarity protection, reversed output polarity protection, load short-circuit protection, surge suppressor					
Ambient temperature		Operating/Storage: –25 to 70°C (with no icing or condensation)					
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)					
Temperature influence		Based on the sensing distance at 23°C in the temperature range of –25 to 70°C					
		±10% max.	±15% max.	±10% max.	±15% max.	±10% max.	±15% max.
Voltage influence		±1.5% max. of sensing distance at rated voltage in the rated voltage ±15% range					
Insulation resistance		50 MΩ min. (at 500 VDC) between current-carrying parts and case					
Dielectric strength		1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case					
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance		Destruction: 1,000 m/s² 10 times each in X, Y, and Z directions					
Degree of protection		IEC IP67 (Pre-wired Models and Pre-wired Connector Models are oil-resistant to the OMRON in-house standard.)					
Connection method		Pre-wired Models (Standard cable length: 2 m), Connector Models, Pre-wired Connector Models (Standard cable length: 300 mm)					
Weight (packed state)	Cable	Approx. 120 g		Approx. 150 g		Approx. 200 g	
	Connector	Approx. 30 g		Approx. 45 g		Approx. 120 g	
	Pre-wired Connector Models	Approx. 50 g		Approx. 70 g		Approx. 140 g	
Materials	Case	Nickel-plated brass					
	Sensing surface	Heat-resistant ABS					
	Clamping nuts	Nickel-plated brass					
	Toothed washer	Zinc-plated iron					
Accessories		Instruction manual					

* The response frequency is an average value.
Measurement conditions are as follows: Standard sensing object, a distance between target objects of twice the size of the standard sensing object, and a set distance of half the sensing distance.

I/O Circuit Diagrams and Timing Charts

■ Output Circuit Diagrams and Connections

E2V-X□C□ (-M1/-M1TJ)



Note: Connector Models
NO Models: ①④③
NC Models: ①②③

Compatible Connector Cables: XS5F Series
XS2F Series

Operation mode

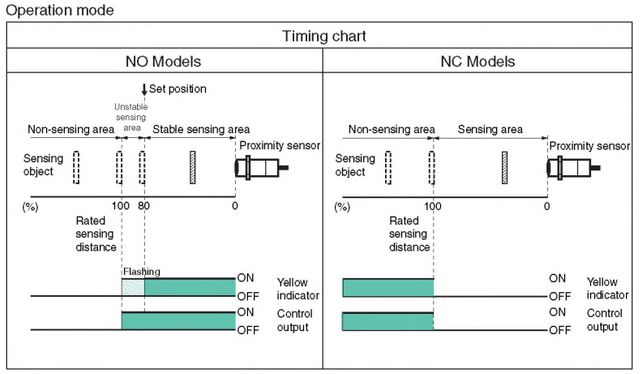

E2V-X□B□ (-M1/-M1TJ)



Note: Connector Models
NO Models: ①④③
NC Models: ①②③



Compatible Connector Cables: XS5F Series
XS2F Series

Safety Precautions

⚠ WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purposes.

Never use the product with an AC power supply. Otherwise, explosion may result.

Engineering Data (Typical)

■ Influence of Sensing Object Size and Material

E2V-X2



E2V-X4



E2V-X5



E2V-X8



E2V-X10



E2V-X15



■ Influence of Sensing Object Size and Material

E2V-X2



E2V-X4



E2V-X5



E2V-X8



E2V-X10



E2V-X15



■ Sensing Area